


DATA SHEET

CM - TT
PM - RI
ST - GC

DUCTS FOR
AIR CON-
DITIONING
SYSTEMS

CANALIZ-
ZAZIONI PER
IMPIANTI DI
CONDIZIO-
NAMENTO

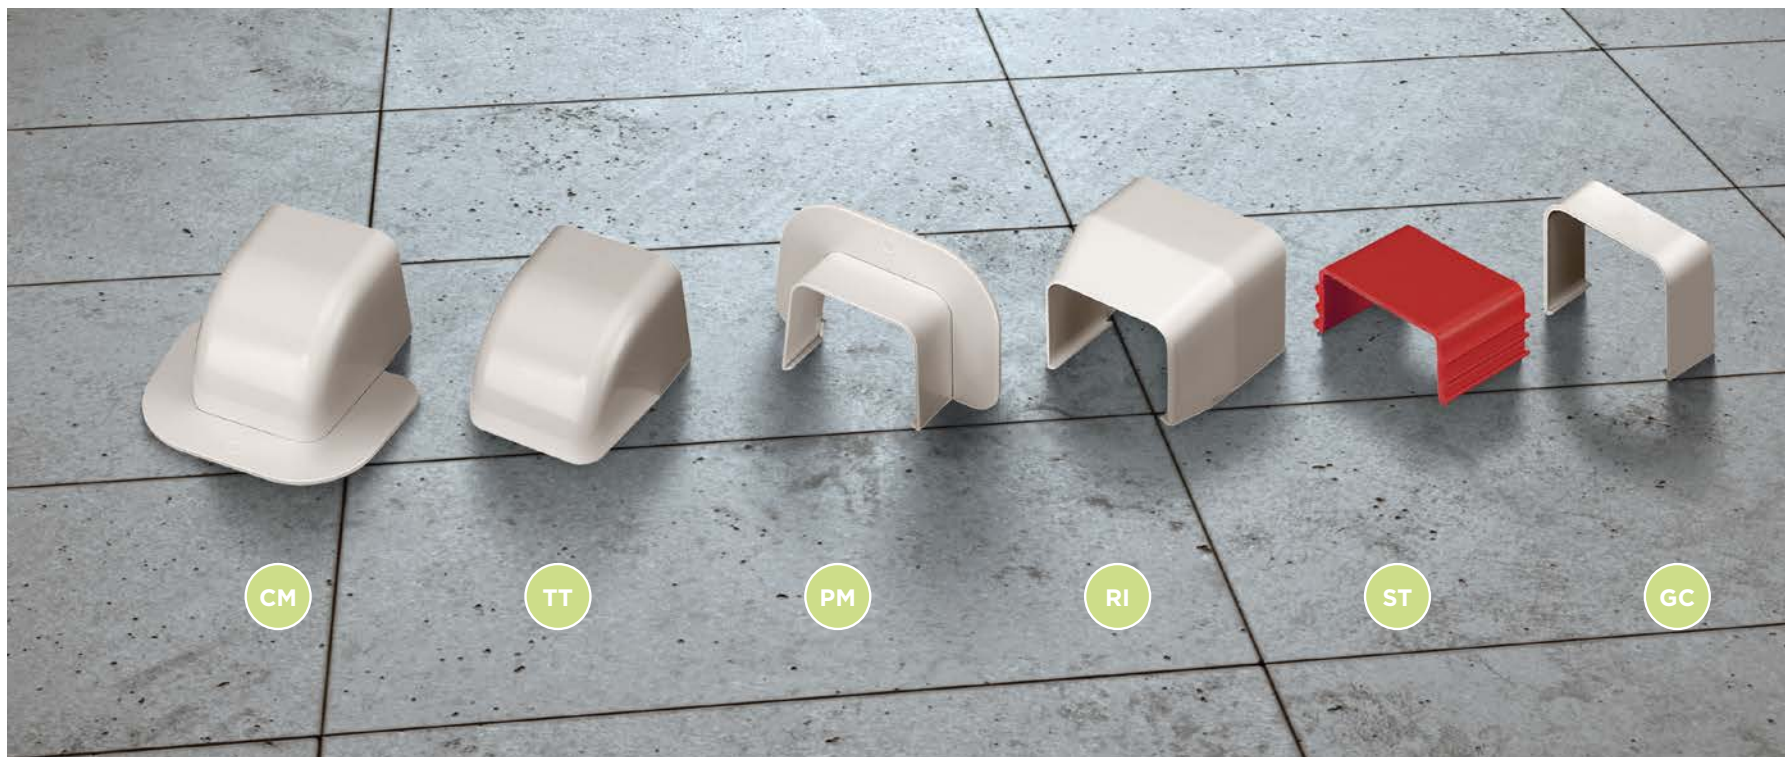

PRODUCT DESCRIPTION

Material: VO self-extinguishing PVC
Operating temperature: -20° +60° C

CM

CODE	DESCRIPTION	BEARING CAPACITY	PACK SIZE
CM 60	Wall curve	1 ml	9 pcs
CM 80	Wall curve	1 ml	6 pcs
CM 120	Wall curve	1 ml	4 pcs

TT

CODE	DESCRIPTION	BEARING CAPACITY	PACK SIZE
TT 60	Terminal plug	1 ml	12 pcs
TT 80	Terminal plug	1 ml	9 pcs

PM

CODE	DESCRIPTION	BEARING CAPACITY	PACK SIZE
PM 60	Wall passage	1 ml	10 pcs
PM 80	Wall passage	1 ml	8 pcs

RI

CODE	DESCRIPTION	BEARING CAPACITY	PACK SIZE
RI 60	Reduction	1 ml	12 pcs
RI 80	Reduction	1 ml	8 pcs

ST

CODE	DESCRIPTION	BEARING CAPACITY	PACK SIZE
ST 60	Pipe fixing brackets	1 ml	30 pcs
ST 80	Pipe fixing brackets	1 ml	30 pcs
ST 120	Pipe fixing brackets	1 ml	20 pcs

GC

CODE	DESCRIPTION	BEARING CAPACITY	PACK SIZE
GC 60	Lid joint	1 ml	30 pcs
GC 80	Lid joint	1 ml	30 pcs
GC 120	Lid joint	1 ml	20 pcs

Rodigas S.r.l.
via Giacomelli, 10
35010 Limena
(PADOVA) ITALY
Tel +39 049 8840056
Fax +39 049 8840060
info@rodigas.it
www.rodigas.it